

### Key Features

- Ideal for outside cabling application
- Armored steel tape for rodent resistance
- Pressure resistance
- Fully water-blocked
- Moisture blocking loose tubes
- Fiber 2 core
- Easy Operation, reliable and cost-effective


This is armored fiber optic patch cord with 2 fibers, which is designed ideal for CPRI cabling system.



### Applications

- FTTA & FTTH
- Base station, BTS installation, BBU to RRU
- Indoor/outdoor building cabling
- Harsh environments application
- Long haul networking
- Direct burial and aerial lashing

### Structure

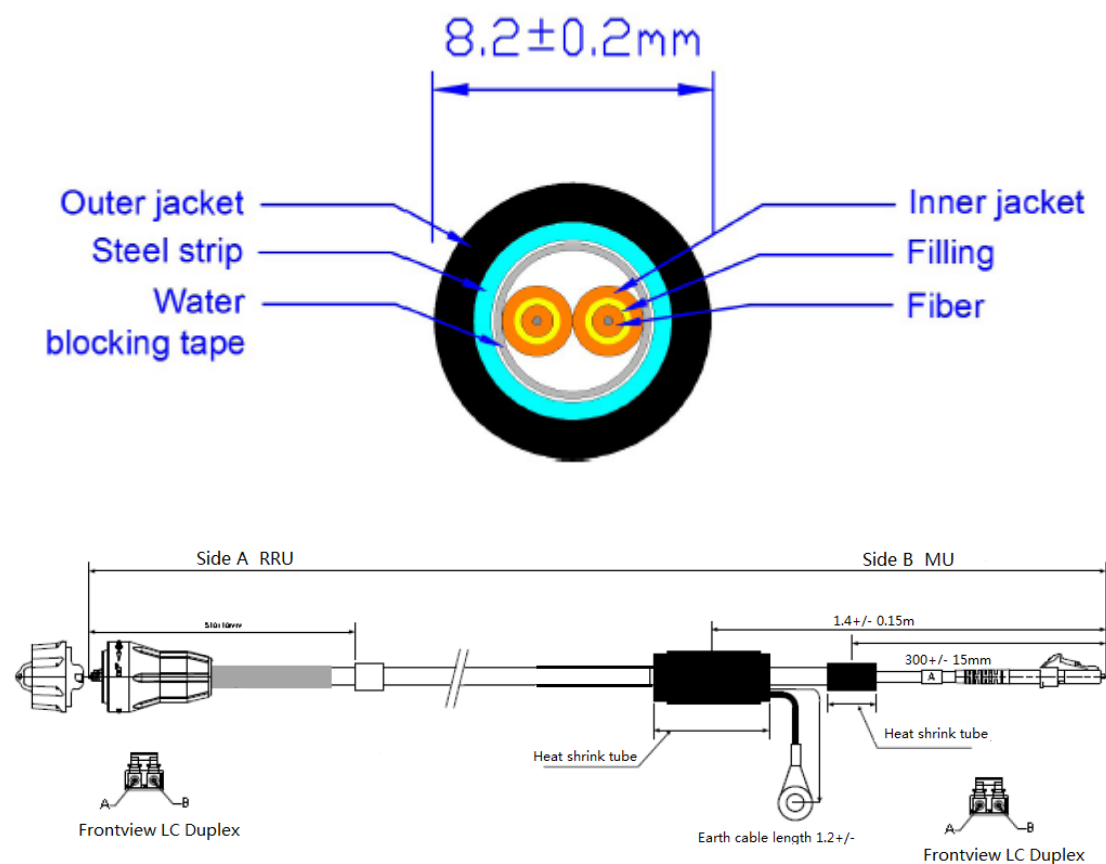

# Specifications

Item	Specifications
Connector A	FULLAXS Duplex LC, Straight boot
Connector B	Duplex LC, Straight boot
Grounding cable	Grounding cable on side B, Length 1.2m
Fiber amount	2 cores
Fiber type	Single mode 9/125um G.657A2
Optical Cable Attenuation at 1310nm	0.4dB/km
Optical Cable Attenuation at 1550nm	0.3dB/km
IL/Connector	≤0.3dB IEC 61300-3-4
Return Loss/Connector	>50dB IEC 61300-3-6
Operation Temperature Range	-20-70℃
Storage Temperature Range	-20-85℃
Tensile strength	350 N maximum
Bending radius	180mm minimum
Crush Resistance	1500 N/100 mm
Outer sheath	PE, full cable armored
Cable sheath color	Black
Cable OD	8.2mm +/-0.3mm
Fan out	3.0mm armored tube, Black color